

NOTES:
Rated Current: 7.0A
Contact Resistance: 20mΩ max
Withstand Voltage: AC 1500V
Insulation Resistance: 1000MΩ/DC 500V
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Sn Over Ni
Insulator Material: PA66 UL94V-0

Ordering Information

WF4141 - 1 WS XX W 0 2

No.of Row -
Single Row







Straight Type

No.of pins
02=02PIN
03=03PIN

-Wcon Internal Code

Package
0=PE bag

— Colour
W=White

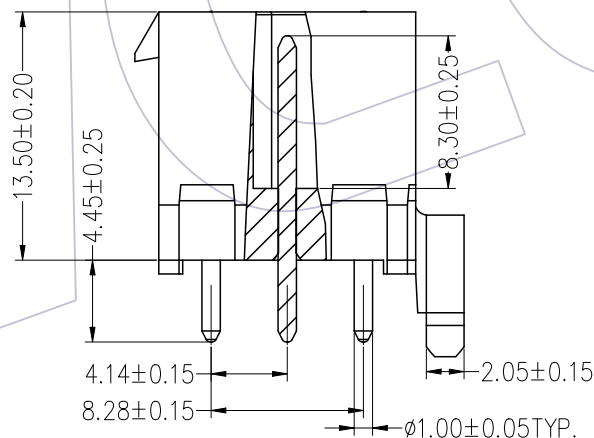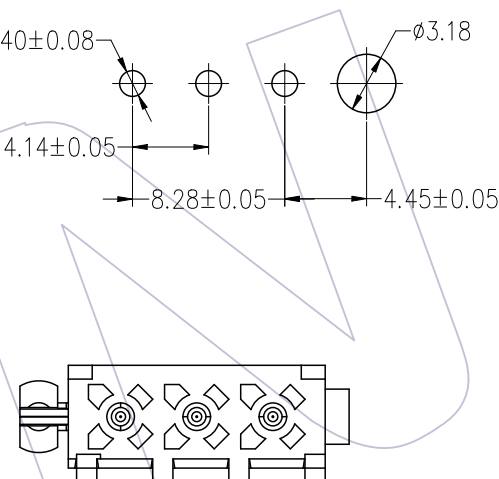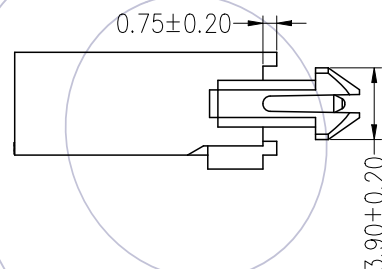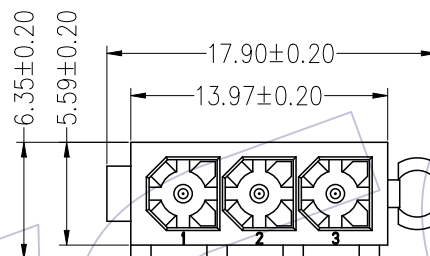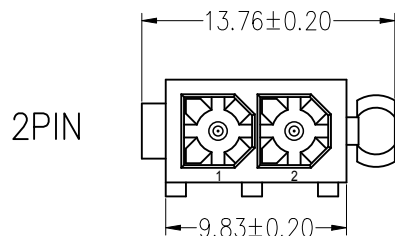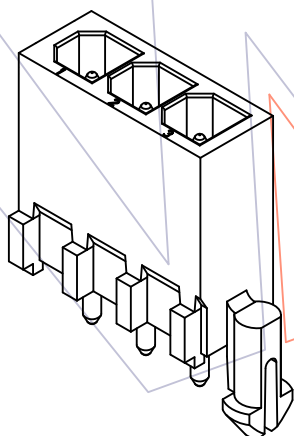

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05 , T=1.57mm)

Specification & Ordering Information:

Circuit	Part No.	Dimension
		A
02	WF4141-1WS02W02	9.83
03	WF4141-1WS03W02	13.97

				OPERATION		DRAW Morris	DATE 2022/11/18	SCALE	FIT	PART NO. WF4141-1WSXXW02	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				x.x	±0.30		CHECK	DATE	UNIT		
				x.xx	±0.25	APPROVE			DATE	SIZE	
AO	2022/11/18	NEW	---	x.xxx	±0.15		DIM	TOL		SHEET	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3'						