

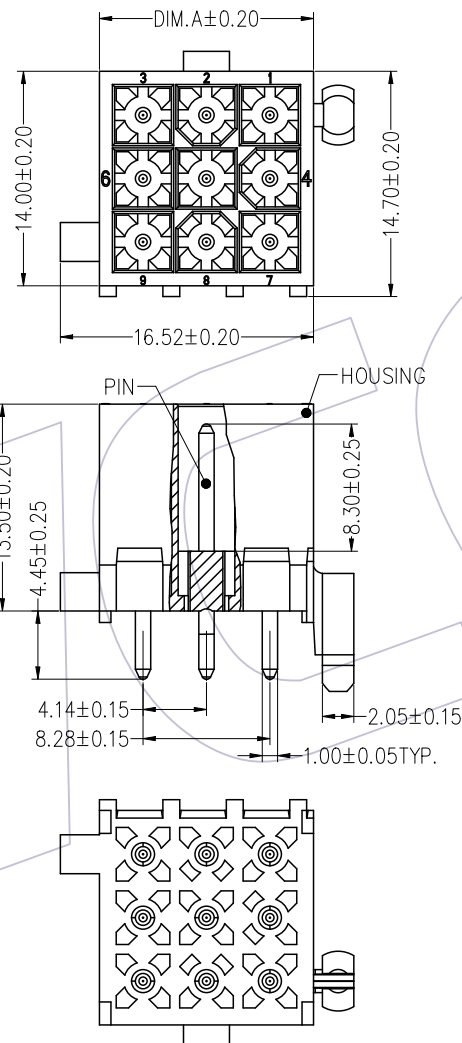


HSF


NOTES:

Rated Current: 7.0A
Contact Resistance: 20mΩ max
Withstand Voltage: AC 1500V
Insulation Resistance: 1000MΩ/DC 500V
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Sn Over Ni
Insulator Material: PA66 UL94V-0

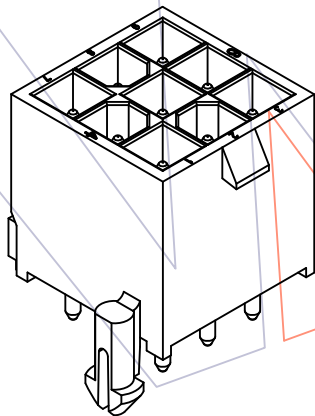

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05 , T=1.57mm)

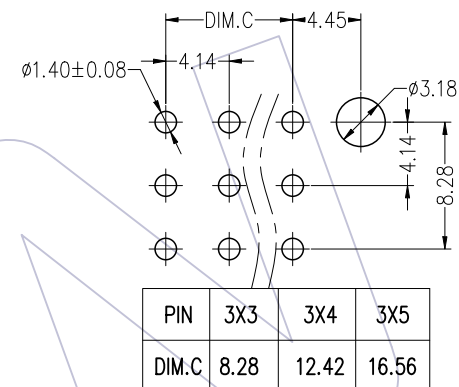

Ordering Information

WF4141 - 3 WS XX W 0 2

No. of Row -
three Row

Straight Type

No. of pins -
03=3X03PIN
04=3X04PIN
05=3X05PIN

Wcon Internal Code

—Package
0=PE bag


— Colour
W=White

Specification & Ordering Information:


Circuit	Part No.	Dimension
		A
3X3	WF4141-3WS03W02	13.97
3X4	WF4141-3WS04W02	18.11
3X5	WF4141-3WS05W02	22.25

				OPERATION		DRAW Morris	DATE 2022/11/18	SCALE	FIT	PART NO. WF4141-3WSXXW02	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.30			CHECK	DATE		
				X.XX	±0.25	APPROVE	DATE			SIZE	
A0	2022/11/18	NEW	---	X.XXX	±0.15			DIM	TOL	SHEET	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3'	PROJ.					

HSF

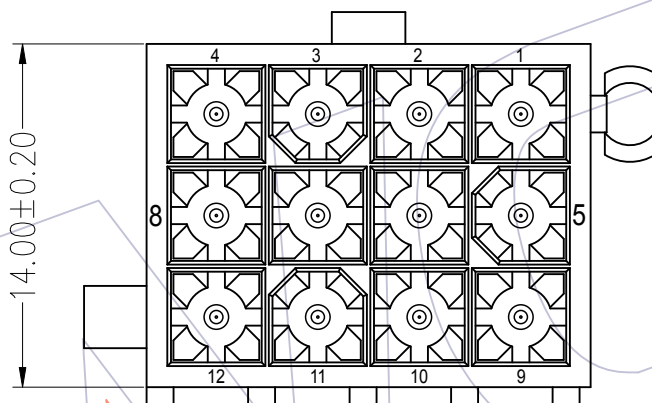

3X4PIN

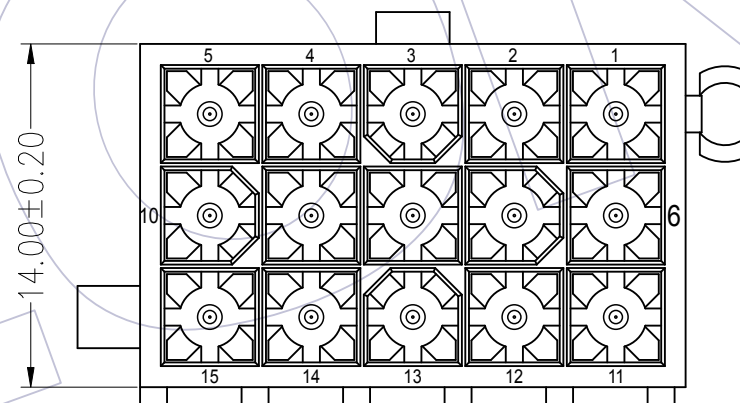

3X5PIN

				OPERATION		DRAW Morris	DATE 2022/11/18	SCALE	FIT	PART NO. WF4141-3WSXXW02	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
				X.X	±0.30			UNIT	mm			
				X.XX	±0.25	CHECK	DATE	SIZE	A4			
A0	2022/11/18	NEW	---	X.XXX	±0.15	APPROVE	DATE	SHEET	2/2	Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°			PROJ.				
				DIM	TOL							