

HSF

NOTES:

Rated Current: 7.0A(16#AWG) .
Applicable Wire: See Table;
Operation Temperature: -40℃ to +105℃
Contact Material: Copper;
Contact Plating:
100μ" Bright TIN overall;
50μ" Nickel underplating overall;

Ordering Information

WF4141 - MT B SN 0X

Crimp
Terminal(Male)



Material
B=BRASS

Plating:
SN=Tin

WCON
internal code(see TABLE)

Direction for Use

Label

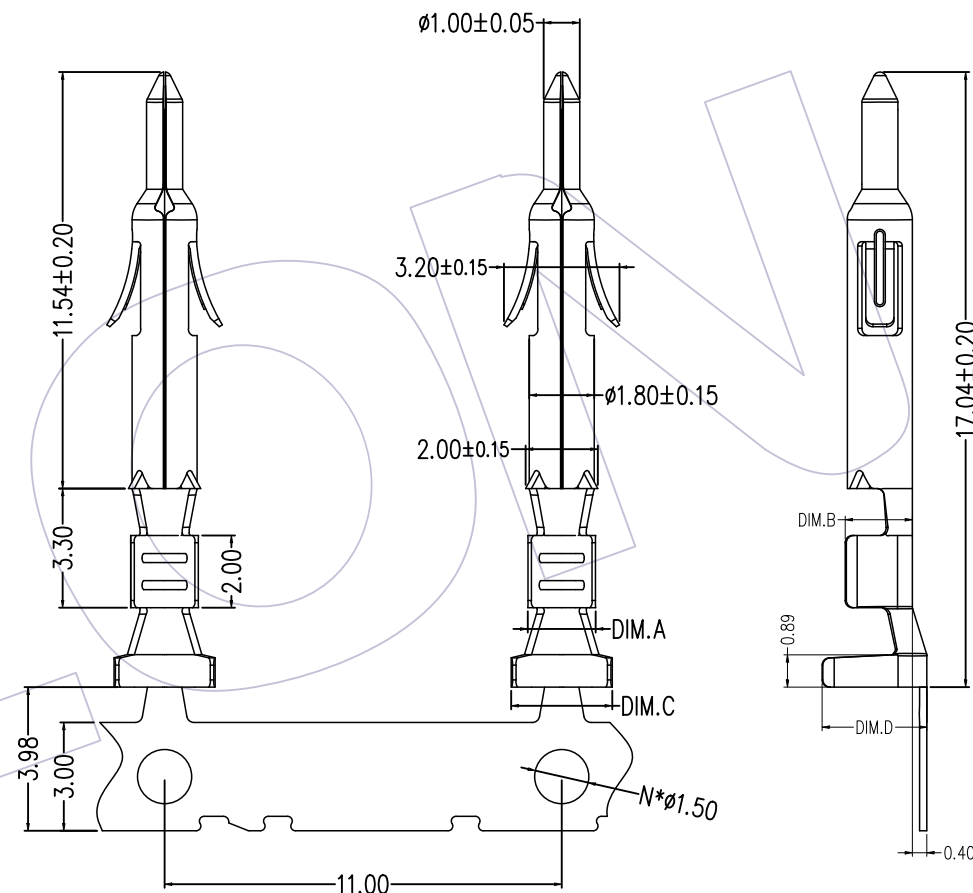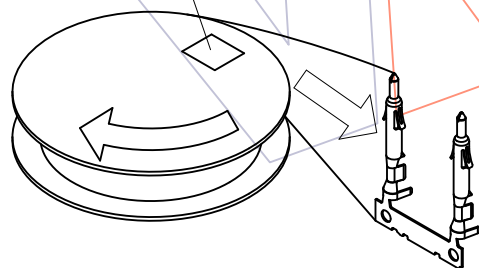

TABLE

WF4141-MTBSN04	1.45	1.37	2.48	1.93	SN 100U"	28AWG, 26AWG	0.89~1.27
WF4141-MTBSN03	2.27	2.21	3.62	4.42		20AWG, 18AWG	1.50~2.39
WF4141-MTBSN02	2.98	2.77	4.26	3.93		16AWG	2.00~3.20
WF4141-MTBSN01	1.92	1.83	2.77	2.92		24AWG, 22AWG	1.20~1.75
P/N	DIM A	DIM B	DIM C	DIM D	FINISH	WIRE DIAMETER	O.D

				OPERATION	DRAW	DATE	SCALE	Fit	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
				X.	±0.30	2022/11/18	UNIT	mm	WF4141-MTBSNOX(SEE TABLE)		
				X.X	±0.30	DATE	SIZE	A4	TITLE:		
				X.XX	±0.30	DATE	SHEET	1/1	4.14mm Housing Terminal ,Male, Crimp Type		
A0	2022/11/18	NEW	Morris	Angle	± 3°	DATE	PROJ.		Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						